## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 12 February 2004 (12.02.2004)

**PCT** 

## (10) International Publication Number WO 2004/014108 A1

- (51) International Patent Classification<sup>7</sup>: **H05B 6/80**, F24C 15/00, 15/16, H05B 6/64, B65D 81/34
- (21) International Application Number:

PCT/GB2003/003411

- (22) International Filing Date: 4 August 2003 (04.08.2003)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0218160.0 0306010.0 6 August 2002 (06.08.2002) GB 17 March 2003 (17.03.2003) GB

- (71) Applicant (for all designated States except US): CAVITY PROTECTION SYSTEMS LIMITED [GB/GB]; 261 Commercial Road, Portsmouth, Hampshire PO1 4BP (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BRAY, Patrick, L. [GB/GB]; 261 Commercial Road, Portsmouth, Hampshire PO1 4BP (GB).


- (74) Agent: BROOKS, Nigel; Hill Hampton, East Meon, Petersfield, Hamphsire GU32 1QN (GB).
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OVEN LINER

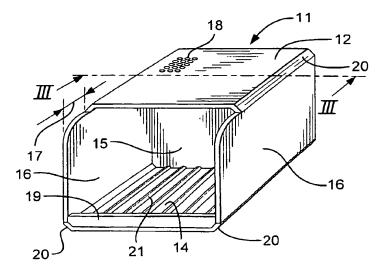

(57) Abstract: A microwave oven liner (11) is an injection moulding having a roof (12), a floor (14), a back (15) and two sides (16). The moulding is of food grade polypropylene, such that the liner can be washed in a commercial dishwasher. The liner is sized to be a sliding fit in a microwave oven. The roof is shorter (17) at the front than the floor to allow air circulation. Further, the roof is apertured, also for air circulation, with a series of small c. 4mm bores (18) registering with the roof aperture (8). A lip (19) is provided across the front of the floor to retain split liquid. The external corners (20) are chamfered to clear the silicone seal (9) for instance. The floor has regularly pitched, 2mm high ridges (21) running front to back. The ridges allow circulation of air beneath a container of food being heated in the oven having the liner.